

*Affordable
wooden floors*



Together we choose the flooring that suits you best

There's no accounting for taste. We all have our own ideas about **trends and colours**, and that's what makes us so unique. We also often have different tastes when it comes to choosing our **interior**, but thanks to our huge range there's something for everyone. Beside the choice from **21 colours**, there are also **different sizes and styles** such as pattern floors, pure or rustic floors in oak and for those who dare, the distinctive floors with exotic wood species. Due to the extensive range, Par-ky fits in with any interior, from a rural home to a modern house.

This brochure is set to take you on a journey of discovery. Be inspired by our wealth of interior tips and discover a '**friendly floor**' that suits you perfectly!

Choose from
21 colours

you will find an overview
on page **43**

Par-ky floors, with a wear layer in real wood, are produced in Belgium with the utmost care.

**MADE IN
BELGIUM**

With great
trend tips




INSPIRATION

- 04 Pattern floors
- 10 Pure oaks
- 20 Rustic oaks
- 30 Character woods



*4 collections from
modern to rustic*

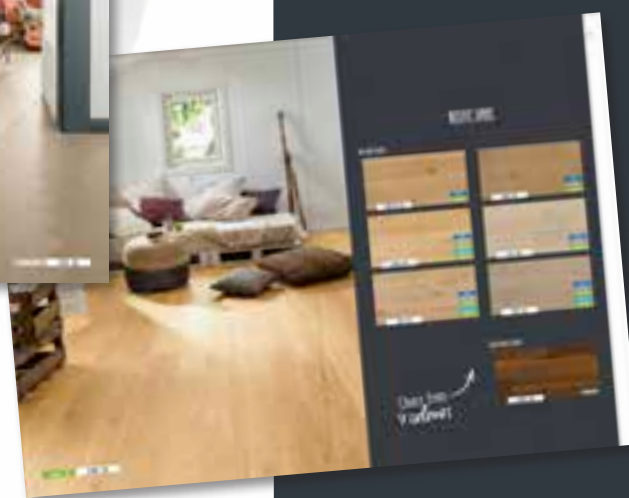

ADVANTAGES

- 40 Why you choose Par-ky

YOUR DREAM FLOOR

- 42 Choose your colour
- 44 Choose the style
- 46 Choose the board size
- 48 Handy overview

NOTHING BEATS THE UNIQUE LOOK AND FEEL OF REAL WOOD!



Do you love **wood**? Then Par-ky is definitely something for you. Oak, Walnut, Ebony or Teak, we have it all. What you see and feel is natural wood and just like in nature, you will not find **2 identical boards** at Par-ky.

Wood also gives a **warm, exclusive and wonderful home feeling**. The beauty of wood cannot be matched by, for example, a laminate, which is only a printed imitation.



PRACTICAL

- 50 Installation and finishing
- 53 Maintenance
- 54 Technical specifications



PATTERN FLOORS

*trendier than
ever before*

These wonderful pattern floors might have been around for years, but they're **trendier than ever**. Don't be misled, this **trend** never goes away. Patterns provide a **unique touch** to your interior, and suit both traditional homes such as town houses, and ultra-modern interiors. The Swing collection is available in different colours and wood species, so you are guaranteed to find a floor in harmony with your interior.

GEOMETRY - CLASS - AUTHENTIC - STYLISH







Create charm with *natural* tones

Put together your colour palette and decide which **tones** fit in with your interior. Coordinate your flooring with your design, that way ensuring an interior **exuding** peace and harmony. The natural tones of wood flooring create an unparalleled **warmth and charm**.



Can also be laid in
*double
herringbone*

Swing 06

IVORY OAK

Choose from
4 colours



Pattern floors are the latest trend in interior design, and Par-ky responds to this with its innovative veneer floors. We combine unique patterns in real wood, with the easy installation of laminate floors.

For example, our Swing collection is equipped with the Unifit X-fold-down click system, which makes the installation child's play. Moreover, Swing allows the floor to be placed in both a single and double herringbone, depending on your preference.

The pattern calculator helps you to simplify the calculation of your space and installation (patterns.par-ky.com).

The installation instructions and installation film can be found at www.par-ky.be/en/downloads




Calculate the space
patterns.par-ky.com



Watch the
installation film



PATTERN FLOORS

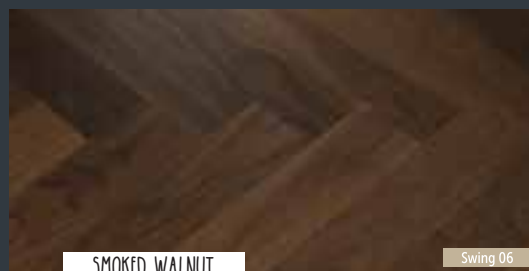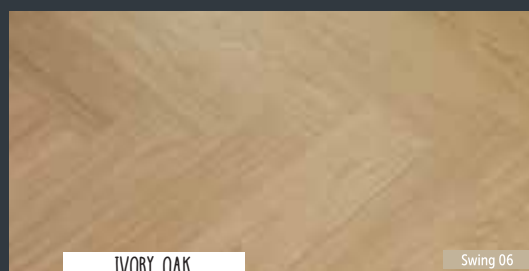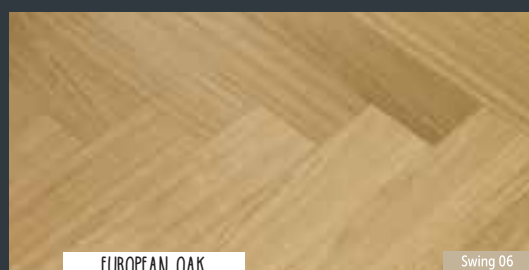





PURE OAKS

*Beauty in its
purest form*

If you want to enjoy the most **beautiful wood**, opt for this pure oak. The focus here is on pure, neat quality, without any rustic knots, but at the same time the natural look and feel of the real wood is preserved.

The thinner the wear layer, the purer the wood, and thus our veneer floor with a 0.6 mm wear layer is our greatest asset. This **PREMIUM** quality provides you all the beauty nature has to offer!

If you're looking for a floor with a thicker wear layer of 2 mm without knots, then the **SELECT** is definitely something for you.

You will find more information
on qualities on pages 44-45.

BRIGHT - CALM - NEAT - TIMELESS - BEAUTIFUL




Large, small, wide or narrow?

The size of the space determines the size of the floor boards. For **smaller spaces** it is best to choose short, narrow boards. In **large spaces**, long and wide boards really come into their own. The direction of the floor boards also have an influence. Long boards in a room's length direction make this space seem even longer. Thanks to the **7 different floorboard sizes**, Par-ky offer a solution for any interior. More information on p 47.



Deluxe+ 06

DESERT OAK

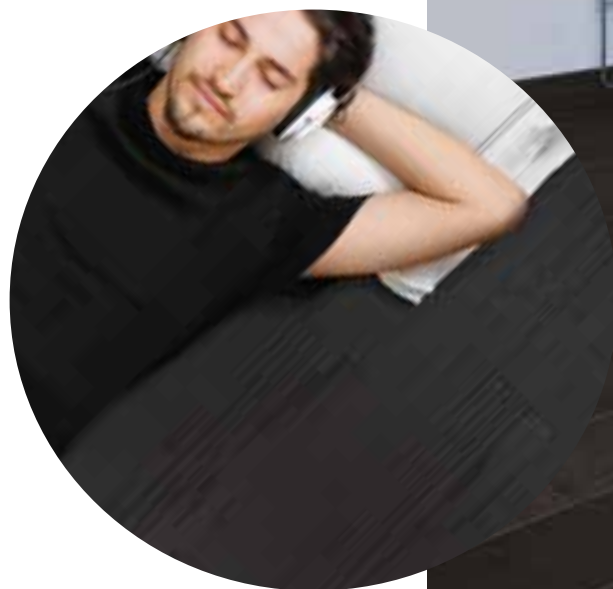

Deluxe+ 06

CHOCOLATE OAK



Pro 06

MILK OAK

As warm and cozy as a *baby's* cot

- **Real wood** provides extra warmth and cosiness. Thanks to the wear layer in real wood, Par-ky is an ideal flooring for the baby's room.
- **Opt for soft tones** to calm your baby. A flooring with a light colour such as Milk Oak in combination with an accent wall is currently on-trend, and form a beautiful combination.
- **Maintenance-friendly and hygienic.** Par-ky is finished off with eight layers of varnish and the V-grooves are provided with the antibacterial protection 'Ultrafresh' and the Aqua Sealing Complete technology. This means the wood is well protected against any little accidents, and our specially developed Park-ky Cleaner makes maintenance child's play.





WHITE *is always* CALMING

Deluxe+ 06

CRYSTAL OAK







In *harmony* with nature

With a **harmonious interior**, it is vitally important that all of the elements in the space coordinate together. That's why you should really think about the **use of colour** and adding furniture and accessories. Try to stick with the style you had in mind when starting your **design**. Remain with a certain colour scheme, and continue with the design based on this. Thanks to Par-ky's **extensive colour range**, you're sure to find a floor that suits your style.











the white pores of the cerused wood
make this Canyon Oak a real Supreme Oak






PURE OAKS

Trendy Oaks

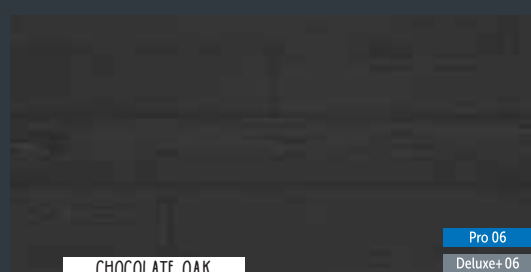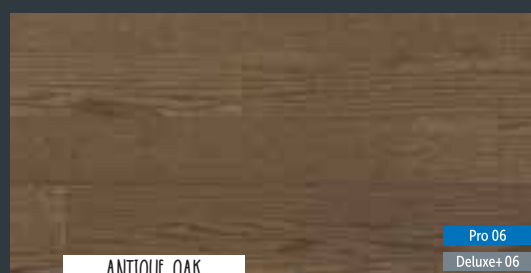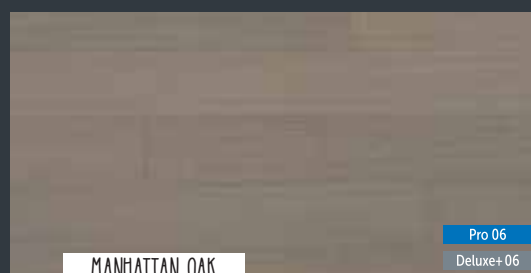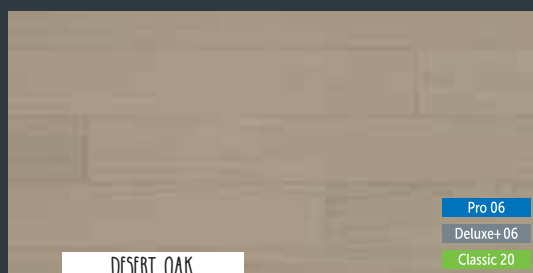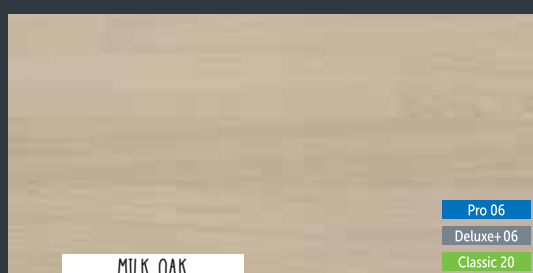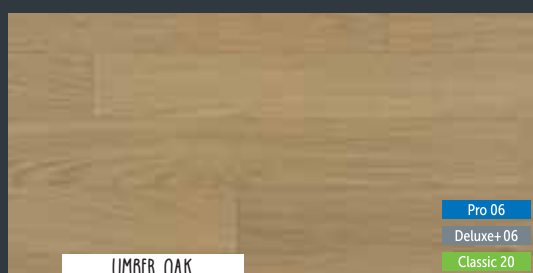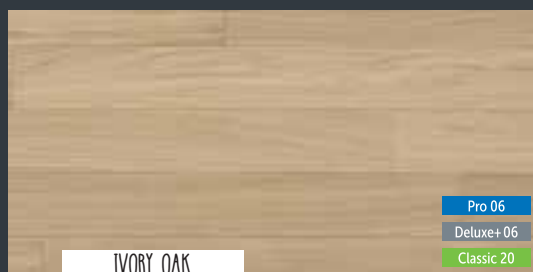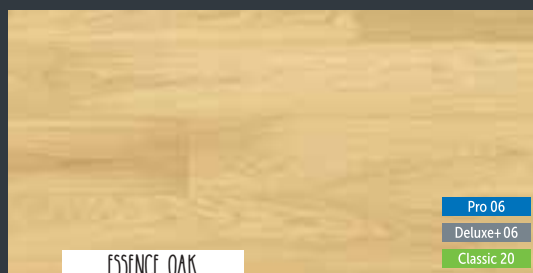

Supreme Oaks

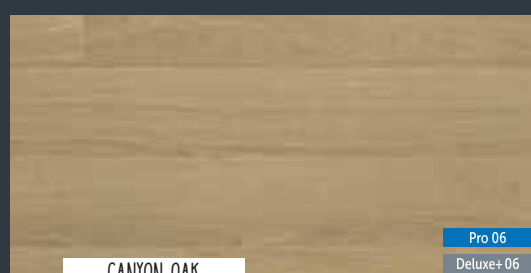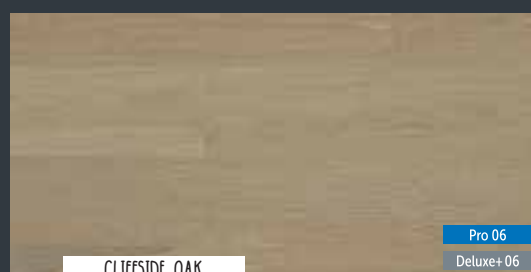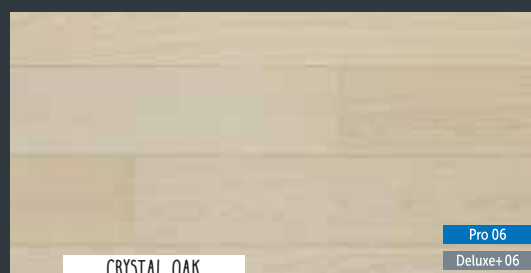

Choice between
12 colours



RUSTIC OAKS

bring nature

Rustic oak floors are loved for their dazzling character and timeless appearance. **Knots, clusters, dark grains...** these are just a few of the natural features that come into their own in these floors. The rustic oaks come in two varieties: **rustic light** is somewhat calmer and displays fewer pronounced natural features, while the **rustic nature** provides a genuine rural character and reflects the wood in all its glory.

You will find more information on our rustic floors on page 45.

Rustic floors suit not only cottages, but are nowadays also combined with a modern interior.

CHARMING - VIBRANT - SPECIAL - STRIKING - NATURAL





Aged flooring with open knots
provides a lot more structure and character



A teenager's room is a space for living, studying and playing, making the choice of interior and flooring extremely important. The room has to be functional and the flooring must also be able to resist an impact. Since the room is used so frequently, something might now and then break or come crashing to the floor. Par-ky also has a solution for this. Minor scratches can easily be repaired using **Par-ky repair pens**. These pens have been developed for each reference, and contain both colour and lacquer. You can eliminate the scratch with the colour pen, and the lacquer ensures the scratch is covered up. That way you prevent dirt from penetrating, and the flooring keeps its original beauty for even longer. That means your teenager can enjoy their room for longer. Find out more on page 53.

*There's NOTHING greater
than being a TEENAGER*





Tips for your dressing room

Dressing rooms are becoming increasingly popular. A walk-in dressing room is than a storage space for your clothes, and besides a well-functioning space, it's also important to create a pleasant atmosphere. So here are a few tips.

1. **Opt for a warm floor**, where you can walk in bare feet. Par-ky has a wear layer in real wood, and thus lends itself perfectly to this space.
2. **Don't choose overbearing colours**, these won't bring out the best in your clothes. With Par-ky you can choose between 21 colours, so there's definitely something to suit your walk-in wardrobe.
3. A dressing room also has to be **maintenance friendly** so that you can easily remove dust. Maintenance is child's play with Par-ky, thanks to the 8 strong varnish layers.
4. Don't forget about the **finishing**. Opt for matching skirtings at the places where your wardrobes stop.
5. Choose natural **daylight** and make the space seem bigger by using light colours and large mirrors.









RUSTIC OAKS

Trendy Oaks

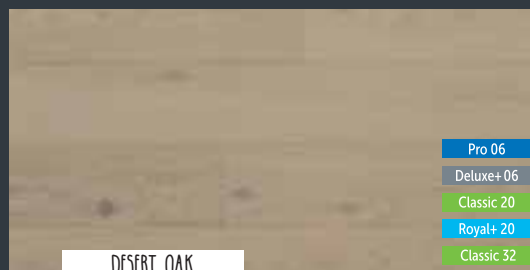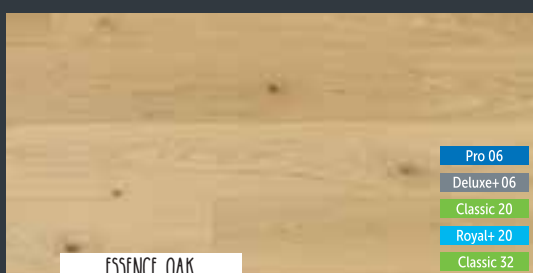

Supreme Oaks



Choice between
7 colours




CHARACTER WOODS

*Discover the breathtaking
variety of nature*

Although oak floors remain hugely popular, we're noticing that a lot of people are looking for alternatives. Each wood specie has its own **characteristic feature**, which provides **variation**. Our exotic floors are durable, ecological and of a high quality, and provide a **stylish, on-trend character** within your home. While exotic wood species are normally hugely expensive, Par-ky makes them **affordable**, since we only work with a thin wear layer in wood, compared with the solid flooring.

Be enchanted...

FIERY - UNIQUE - PASSION - POWERFUL

A woman with her eyes closed is sitting in a lotus position on a light-colored bamboo floor. She is wearing a white tank top and grey pants. Her hands are resting on her knees in a mudra. In the background, there is a white chair and a window with sheer curtains letting in natural light.

Becoming one with nature
we can help on the way !



Perfect to use in combination
with underfloor heating.



Lounge 06 SHADOW MACASSAR

We can take a KNOCK

Par-ky flooring is ultra-strong, thanks to the HDF (high density fibreboard) in combination with the **8 ultrastrong layers of lacquer**. This makes Par-ky more resistant to impacts than solid parquet or engineered parquet with a core other than HDF, such as pine. Moreover, the **thickness of the wear layer** also plays a part in the floor's strength. The thinner the wood, the better the floor can withstand impact. This is because the HDF directly beneath it has a higher density than any wood specie.




Lounge 06

ROSEWOOD SANTOS



Lounge 06

JATOBÁ

A man and a woman are sitting on a light-colored wooden floor in front of a fireplace. The man is wearing a white shirt and blue jeans, and the woman is wearing a grey long-sleeved shirt and dark blue pants. They are both looking towards the camera. The fireplace has a fire burning inside. A white arrow points from the text to the fireplace area.

Matching skirting available
for the entire range



Sealed or Brushed?

The majority of the floors from the character woods collection have a sealed finish. With these, the wood pores are filled with varnish. This way, you obtain an extremely strong protective layer on the natural wood, making your floor resistant to moisture and dirt.

However, some wood species have a structure that allows a brushed finish. The Afrormosia, Smoked Walnut in our 2 mm wear layer and our newest Cotton Triba are brushed. This brushed finish accentuates the natural structure of the wood, and allows the grain to stand out more. Moreover, these floors are given a mat coating, meaning the natural appearance is retained.





Smoked Walnut now also available
with a 2mm wear layer,
in both select and rustic grade

Classic 20

SMOKED WALNUT



CHARACTER WOODS

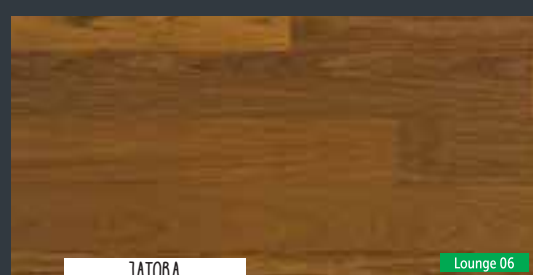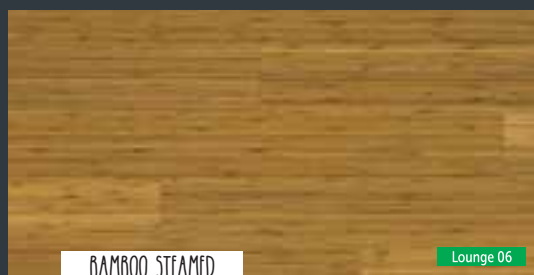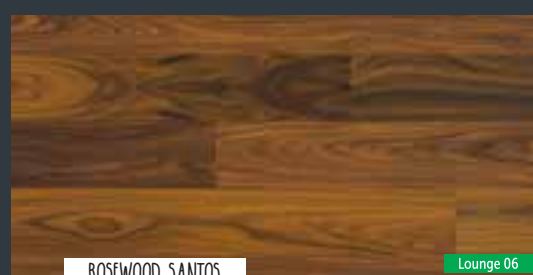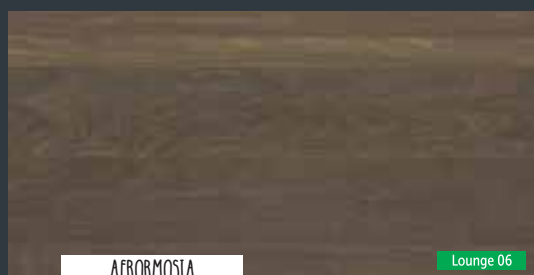

*Exclusive
wood species*



In solid parquet, these wood species are expensive and unstable. In contrast, with its thin wear layer Par-ky is able to offer a genuine wood flooring that's affordable, stable and long-lasting. If you like character, you're sure to find a flooring you'll fall for here.

A sustainable choice

Par-ky loves **wood**, so we are very careful how we use this precious, natural **resource**. We **optimise the use** of this raw material by slicing it into very thin flitches instead of using thick lumber boards where most of the wood is underutilized. In addition, all our wood comes from **sustainable forests**.

Nearly one third of the energy that we need for the production of our floors is generated by our own **solar panels**. We also installed **2 wind turbines** that provide us with extra sustainable energy. We also reduce our waste by collecting sawdust and wood chips which can be used as **heating fuel** during the cold months. Less waste, less fuel, fewer emissions. And there's more good news: we are aiming to be able to produce on a completely **CO2-neutral** basis by 2020!

Easy installation

With Par-ky, you enjoy all the practical benefits of laminate, without having laminate in your home. This is because our floors are equipped with the clever **Uniclic®** and **Unifit X®** system for a fast and easy installation.



UNIFIT X®
PATENTED TECHNOLOGY



DOUBLE
SIDED
IMPREGNATION **dsi**

Stronger than solid parquet

Par-ky is exceptionally **resistant to impacts**. The secret lies in its well thought-out structure. This is because Par-ky consists of an ultra-strong, High Density Fibreboard (or **HDF**), onto which the wood wear layer is pressed with the **DSI system** (Double Sided Impregnation). During the pressing process, the **glue** is pressed into the wood as much as possible, until it is saturated. The wear layer is then finished off with no less than **8 thick varnish layers**, which are also absorbed by the wood and thus come into contact with the glue. In this way, the wood is entirely saturated and becomes extremely strong when setting. Thanks to this structure, our floors are exceptionally resistant to impacts, and are stronger and more stable than solid parquet.



Wear layer 0.6 mm
Oak



Wear layer 2 mm
Oak



Wear layer 3.2 mm
Oak



Wear layer 3.2 mm
Oak on a pine core



Hygienic

Thanks to the **Aqua Sealing Complete** system, the V-grooves are coloured in and lacquered over, protecting from moisture.

The V-groove is also provided with "**Ultrafresh**" antibacterial protection. This means that bacteria will not settle there, and so your floor remains not only clean, but also hygienic.

Be sure also to see our adapted **cleaners** for maintaining your Par-ky flooring effectively and easily.

Real wood

Every Par-ky board is finished off with a wear layer in **real wood**. This means you get a floor that looks like a solid floor, although at affordable prices. Since we use real wood, with Par-ky – just like in nature – you won't find **two identical boards**. What's more, the wood also feels pleasantly **warm**.



*That's why
you choose PAR-KY !*

Perfect to use in
combination with
underfloor heating.

More information can be found
at www.par-ky.be/en/downloads.

Par-ky floors guarantee healthy air quality

To finish off our floor boards, we only use **water-base stains, glues without VOC (Volatile Organic Compounds) and lacquer with a minimum of harmful solvents**. This makes it scientifically proven that air quality is better where a Par-ky is fitted. The HDF layer (High Density Fibreboard) in the middle of our boards is of the **highest quality**. This is why our floors achieve the quality label A+.





CHOOSE the colour
that SUITS you best!

Trendy Oaks

CHOOSE YOUR COLOUR | 43



EUROPEAN OAK



ESSENCE OAK



IVORY OAK




UMBER OAK



MILK OAK



DESERT OAK

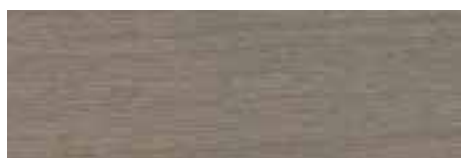

MANHATTAN OAK



ANTIQUE OAK



CHOCOLATE OAK

Supreme Oaks



CRYSTAL OAK



CLIFFSIDE OAK



CANYON OAK



HISTORY OAK

Character Woods



SMOKED WALNUT



COTTON TRIBA



AFRORMOSIA



TEAK



SHADOW MACASSAR



ROSEWOOD SANTOS



BAMBOO STEAMED



JATOBA

On this page you will find an overview of all of the colours. You will find more information on which colour is possible with which style, floorboard size or wear layer on page 48-49.

Par-ky[®]
friendly floors

For us, PURCHASING oak responsibly isn't a trend, but has been part of our DNA from the beginning.

For purchasing high-quality wood, our buyers are constantly on the lookout for the best suppliers, to guarantee each floorboard produced meets our strict requirements. Our Pure Wood charter furthermore guarantees that all of the wood originates from sustainably managed forests. Various aesthetic qualities are possible in our Trendy Oaks range, depending on the thickness of the wear layer.

	PURE OAKS			
	PREMIUM		SELECT	
	For the 'Premium' grade, only the purest veneer wood of 0.6 mm is used. These wear layers are of an exceptionally pure quality, providing the most beauty nature has to offer.		A 2 mm wear layer means a select quality: somewhat more natural features of wood, a wonderful blend of structures, more pronounced wood grains, etc...	
				
	wear layer 0,6 mm		wear layer 2 mm	
Trendy Oaks				
EUROPEAN OAK	Pro 06	Deluxe+06	Swing 06	Classic 20
ESSENCE OAK				
IVORY OAK			Swing 06	
UMBER OAK				
MILK OAK				
DESERT OAK			Swing 06	
MANHATTAN OAK				
ANTIQUE OAK				
CHOCOLATE OAK				
Supreme Oaks				
CRYSTAL OAK	Pro 06	Deluxe+06		
CLIFFSIDE OAK				
CANYON OAK				
HISTORY OAK				

[illegible]

RUSTIC NATURE

With this intense rustic floor you bring nature indoors: the knots and the natural character of the wood are striking. The history oak goes even one step further. Its open knots and cracks result in a character truly intense and marked with age.

wear layer
3,2 mm

Classic 32

Deluxe+06











Long, wide board ideal
for large spaces


the PRO board is
the ultimate
alternative to
laminate:
wood at the price
of laminate

SWING and DELUXE now with the
Unifit X click system, which makes the
installation even easier

On this page you will find an overview of all of the dimensions and wear layers for both the board floors and the pattern floors. You will find an overview of which colour and style corresponds with which floorboard on page 48-49.

6 board floors

Wear layer 0,6 mm		Pro 06		Length 1203 mm (47-3/8") - Width 190 mm (7-1/2") - Thickness 7.2 mm (9/32")
		Lounge 06		Length 1203 mm (47-3/8") - Width 124 mm (4-7/8") - Thickness 8.3 mm (5/16")
Wear layer 2 mm		Deluxe+ 06		Length 1810 mm (71-1/4") - Width 166 mm (6-1/2") - Thickness 12 mm (1/2") incl. 2 mm cork
		Royal+ 20		Length 1935 mm (76-3/16") - Width 194 mm (7-5/8") - Thickness 12 mm (1/2") incl. 2 mm cork
Wear layer 3,2 mm		Classic 32		Length 1184 mm (46-5/8") - Width 148 mm (5-7/8") - Thickness 14 mm (9/16")



UNIFIT X
PATENTED TECHNOLOGY

New! Fold-down possible with Unifit X®
30% time gain when installing

pattern floor

Wear layer 0,6 mm		Swing 06		Length 595 mm (23-7/16") - Width 121 mm (4-3/4") - Thickness 10 mm (3/8")
----------------------	---	-----------------	--	---


Calculate the space
patterns.par-ky.com



Watch the
installation film



HERRINGBONE





DOUBLE HERRINGBONE





Handy
overview!

Par-ky
friendly floors

	FLOOR BOARD	Dimensions
		Thickness
		Click system
	BOX	# boards
		Surface
FINISH	BEVEL	Maxi ± 1.5 mm
		Mini ± 0.5 mm
		Micro ± 0.1 mm
	GLOSS	
	STRUCTURE	

Trendy Oaks

EUROPEAN OAK	PURE	Premium Select
	RUSTIC	Rustic Light Rustic Nature
ESSENCE OAK	PURE	Premium Select
	RUSTIC	Rustic Light Rustic Nature
IVORY OAK	PURE	Premium Select
	RUSTIC	Rustic Light Rustic Nature
UMBER OAK	PURE	Premium Select
	RUSTIC	Rustic Light Rustic Nature
MILK OAK	PURE	Premium Select
	RUSTIC	Rustic Light Rustic Nature
DESERT OAK	PURE	Premium Select
	RUSTIC	Rustic Light Rustic Nature
MANHATTAN OAK	PURE	Premium
ANTIQUE OAK	PURE	Premium
CHOCOLATE OAK	PURE	Premium

Supreme Oaks


CRYSTAL OAK	PURE	Premium
CLIFFSIDE OAK	PURE	Premium
CANYON OAK	PURE	Premium
HISTORY OAK	RUSTIC	Rustic Nature*

Character Woods

SMOKED WALNUT	Premium
	Select
	Rustic
COTTON TRIBA	
AFRORMOSIA	
TEAK	
SHADOW MACASSAR	
ROSEWOOD SANTOS	
BAMBOO STEAMED	
JATOBA	

"DO IT YOURSELF" installation has never been so EASY

Installation instructions can be found on each package,
at www.par-ky.com/en/Downloads or
by scanning the code with your smartphone.





Installation set

Installing Par-ky is really very easy. With our installation kit you have all the tools you need to install your Par-ky floor quickly and without damaging it: spacers to create expansion joints, pull bar and tapping block.



Which underlay should I choose ?



Use the Par-ky damp-proof foil (150 micron) for floors with an integrated cork layer. To prevent subfloor dampness damaging your floor, seal the edges together with Par-ky waterproof tape.

for use with

Deluxe+ 06 Royal+ 20



25 m²
(269 sq/ft)
per pack



A SOUND-INSULATING SOLUTION:

Par-ky aluminium underlay (3.6 mm - 9/64") reduces reflected noise and levels minor dips in the subfloor. Always lay with the aluminium side up and seal the edges together with waterproof tape. This prevents substrate dampness damaging the floor.

for use with

Pro 06 Lounge 06 Classic 20 Classic 32 Swing 06



15.07 m²
(162 sq/ft)
Roll



A STANDARD solution:

The standard underlay (2 mm - 5/64") consists of foam and plastic. The integrated plastic prevents dampness from the substrate damaging your floor. We recommend sticking the strips together with Par-ky waterproof tape.

for use with

Pro 06 Lounge 06 Classic 20 Classic 32 Swing 06



50 m²
(528 sq/ft)
or 20 m²
(215 sq/ft)
Rolls

Waterproof tape



The floor has to be protected against rising damp. To stick our quality underlays together, we strongly recommend using the tested waterproof tape from Par-ky. Only in this way can you protect the underside of your floor against dampness.



Smart tools for that PERFECT finish

Veneer skirting

1 skirting, 3 heights

The icing on the cake: once your Par-ky floor is installed, you can fit MATCHING WOOD SKIRTINGS for that finishing touch. Our trendy skirtings are 8 cm (3-1/8") high but they can easily be shortened to 6 cm (2-1/4") or even 2.5 cm (1"). Cut the skirtings to the desired height along the grooves. It's up to you to decide.

Veneer skirting dimensions:

2150 x 80 x 14 mm (84-5/8 x 3-1/8 x 9/16")



Paintable skirting

New in our range is the white paintable skirting that provides a neat, modern look. What's more, it's also possible to paint the skirting along with the wall.

Paintable skirting dimensions:

2150 x 69 x 12 mm

(84-5/8 x 2-3/4 x 1/2")



Profiles

A. Wooden profile (domestic use)

1 profile, 3 applications

Everyone will appreciate our 3-in-1 profile that's available in the 21 Par-ky designs.

Really handy for:

1. End profile (jointless horizontal finish)
2. Reducer profile (to bridge the gap with a lower floor)
3. T-profile (expansion profile).

Dimensions profile: 2150 x 47 x 11 mm (84-5/8 x 1-7/8 x 7/16")



1. End profile

2. Reducer profile

3. T-profile

B. Aluminium profiles (intensive use)

2 profiles

Par-ky has developed aluminium profiles for all the Trendy Oaks. These profiles are much stronger than the wooden variant and are therefore recommended for intensive use.

Dimensions profile:

- Connecting profile **900 x 38 mm** (35-7/16 x 1-1/2")
- End profile **2700 x 30 mm** (106-5/16 x 1-3/16")



Connecting profile

End profile

Keep your floor in good CONDITION

To clean your Par-ky floor without damaging the lacquer, we recommend to use our Par-ky cleaner. This was specially developed to remove dirt while protecting the wood.



Wood Floor Cleaner

1000 ml (33.8 oz.)

The cleaner must be diluted with water.
Clean using a damp cloth.



Ready to use Wood Floor Cleaner

500 ml spray (16.9 oz.)

Handy to use, you can apply this directly onto the floor or the mop.



Repair pens

Small scratches can easily be repaired. Boxes are available with 1 or 2 pens, depending on the shade of your Par-ky floor. After the repair, dirt can no longer get into the scratch.

The instructions for use are available at www.par-ky.com/en/Downloads.



Repair wax

A small hole, quickly fixed. Par-ky has developed a repair wax for deeper holes. This allows holes that extend through the varnish to be repaired, thereby protecting the floor against the ingress of moisture.

The repair wax kit contains 7 wax blocks, a melting knife and a spatula. The instructions can be found on the packaging or at www.par-ky.com/en/Downloads.



More extensive damage, no disaster

In case of larger damage, you can easily replace a floorboard in the middle of the floor with the Par-ky bulldog thanks to the Uniclic® joining system. Consult your dealer.

Instructions and a handy film clip can be found at www.par-ky.com/en/Downloads, click on Bulldog video and Bulldog instructions for more information.

		Pro 06		Lounge 06	
		brushed	sealed	brushed	sealed
GENERAL PROPERTIES	Wood veneer floor covering	EN14354/EN14352			
	Domestic usage classification	EN685		Class 23	
	Commercial usage classification	EN685		Class 31 (on demand class 33)	
	Warranty	DECOSPAN nv		15 years	20 years
	CE certification	EN14342		EN14342:2013	
	Dop Nr.	14001		14002	
	Moisture content	EN322		<6 %	
	Dimensions of floor boards	EN14354		1203 x 190 x 7,2 mm	
	Thickness of the wear layer	EN14354		0,6 mm	
	Deviation of thickness	EN14354		<0,5 mm	
	Deviation of squareness	EN324-2		<0,2 mm	
	Cup in width direction	EN14354		<0,2 %	
	Flatness deviation			4 %	
	Internal bond	EN319		>1,4 N/mm ²	
	Veneer glueing adhesion	EN204/205		≥1 N/mm ²	
	Mechanical connection system			Uniclic system	
	Opening between elements	EN14354		<0,2 mm	
	Tensile strength on short end	ISO24334		500 kg/lm	
	Density	EN323/EN672		>900 kg/m ³	
	Weight/sqm			7 kg	
CLASSIFICATIONS PROPERTIES	Thickness distension	EN 13329 annex G		<8 %	
	Resistance to indentation	EN 1534		≥20 N/mm ²	≥30 N/mm ²
	Resistance to abrasion	EN 14354//EN112,73.XX		>3000 rev.	>5000 rev.
	Impact resistance	EN 438-2.21EC2		>1200 (EC2)	
	Adhesion of the lacquer	EN ISO 2409		class <2	
	Resistance to chemical agents	EN 423/part 2		grade 4*	
ADDITIONAL PROPERTIES	Appearance of the lacquer	EN 438/2-5		ok	
	Gloss	EN 2813		matt 10% (+/-5) satin 20% (+/-5)	matt 10% (+/-5) satin 20% (+/-5)
	Hardness of the lacquer	DIN 53154		3 Newton	
	Residual indentation	EN 433		<0,05 mm	
	Impact resistance acc. to Wegner	EN 438-2/11		>5 Newton	>8 Newton
	Elasticity of the lacquer	CEN/TC112 (Brinell)		2 Hb	
	Colour fastness	EN 105-B02		grade >6	
	Castor chair resistance	EN 425		no visible change	
	Burning cigarette	EN 438-2/30		Class 3**	
	Underfloor heating/cooling			ok	
	Thermal resistance	EN 12667		0,053 m ² K/W	
	Thermal conduction	EN 12667		0,14 W/mK	
	Normalized impact sound pressure level	ISO 2-717 & 3-10140 (Ln,w)		55 dB	
	Reduction of impact sound pressure level	ISO 2-717 & 3-10140 (ΔLw)		20 dB	
	A-weighted walking noise	EN 16205:2018 (Ln,walk,A)		91 dB (A)	
	Loudness of reflected walking noise	EN16205:2018 Loudness RWS		68,7 sone	
	Antistatic performance	EN 1815		< 2 kV (antistatic)	
	Biological durability	EN 335-1/EN335-2		Class 1	
	Well-managed forests			FSC® certified (optional)	
	Resistance to termites			good	
	Resistance to bacteria			Ultrafresh	
	Recycling			ok	
SAFETY PROPERTIES	VOC loss	EN 664		<2,1 %	
	VOC loss	French legislation ISO16000		A+	
	VOC M1 EU			Pass	
	VOC LEED V4/CDPH			Compliant	
	VOC BREEAM			Compliant	
	VOC Indoor air comfort GOLD			Pass	
	Formaldehyde emission	E1 (EN 717-1)		Class E1 (<0,13 ppm)	
	Formaldehyde emission	E1 (EN 717-2)		Class E1 (<3,5 mg/m ³ h)	
	Formaldehyde emission	ASTM E 1333-96		CARB 2	
	Exudation of plasticizers	EN 665		0 %	
	PCP (pentachlorophenol)	CEN/TR 14823		PCP free	
	Burning cigarette	EN 438-2/30		Class 3**	
	Fire reaction and smoke generation	EN 13501-1		Class Cfl s1 (on demand Bfl s1)	
	Slip resistance (dry conditions)	DIN 51131		Class R11 (average)	
	Slip resistance (wet conditions)	EN 1339 (pendule)		Class ≥15 (USRV)	

Deluxe+ 06		Classic 20	Royal+ 20	Classic 32	Swing 06	
brushed	sealed	brushed	brushed	brushed	brushed	sealed
Class 23		Class 22	Class 22	Class 23	Class 23	
Class 31 (on demand class 33)		Class 31	Class 31	Class 31	Class 31 (on demand class 33)	
15 years	20 years	15 years	15 years	15 years	15 years	20 years
EN14342:2013		EN14342:2005+A1:2008	EN14342:2005+A1:2008	EN14342:2005+A1:2008	EN14342:2013	
15001		15010	15012	15013	18001	
≤6 %		≤9 %	≤9 %	≤9 %	≤6 %	
1810 x 166 x 12 mm		1185 x 150 x 10 mm	1935 x 194 x 12 mm	1184 x 148 x 14 mm	595 x 121 x 10 mm	
0,6 mm		2 mm	2 mm	3,2 mm	0,6 mm	
≤0,5 mm		≤0,5 mm	≤0,5 mm	≤0,5 mm	≤0,5 mm	
≤0,2 mm		≤0,2 mm	≤0,2 mm	≤0,2 mm	≤0,2 mm	
≤0,2 %		≤1 %	≤1 %	≤1 %	≤0,2 %	
3 %		4 %	4 %	4 %	3 %	
>1,3 N/mm²		>1,3 N/mm²	>1,3 N/mm²	>1,3 N/mm²	>1,3 N/mm²	
≥1 N/mm²		≥1 N/mm²	≥1 N/mm²	≥1 N/mm²	≥1 N/mm²	
Unifit X + Uniclic system		Uniclic system	Uniclic system	Uniclic system	Unifit X + Uniclic system	
≤0,2 mm		≤0,2 mm	≤0,2 mm	≤0,2 mm	≤0,2 mm	
550 kg/lm		675 kg/lm	600 kg/lm	1300 kg/lm	450 kg/lm	
>850 kg/m³		>850 kg/m³	>850 kg/m³	>850 kg/m³	>850 kg/m³	
10 kg		8 kg	10 kg	12 kg	7 kg	
≤10 %		≤8 %	≤8 %	≤8 %	≤10 %	
≥20 N/mm²	≥30 N/mm²	≥20 N/mm²	≥20 N/mm²	≥20 N/mm²	≥20 N/mm²	≥30 N/mm²
>3000 rev.	>5000 rev.	>3000 rev.	>3000 rev.	>3000 rev.	>3000 rev.	>5000 rev.
>1200 (EC2)		>1200 (EC2)		>1200 (EC2)		
class <2		class <2		class <2		
grade 4*		grade 4*		grade 4*		
ok		ok		ok		
matt 10% (+/-5) satin 20% (+/-5)		matt 10% (+/-5)		matt 10% (+/-5) satin 20% (+/-5)		
3 Newton		2 Newton		2 Newton		
<0,05 mm		<0,05 mm		<0,05 mm		
>5 Newton		>2,5 Newton		>2,5 Newton		
>8 Newton		>2,5 Newton		>2,5 Newton		
>5 Newton		>2,5 Newton		>2,5 Newton		
>8 Newton		>2,5 Newton		>2,5 Newton		
2 Hb		2 Hb		2 Hb		
grade >6		grade >6		grade >6		
no visible change		no visible change		no visible change		
Class 3**		Class 3**		Class 3**		
ok		ok but glued		ok but glued		
0,109 m²K/W		0,100 m²K/W		0,100 m²K/W		
0,11 W/mK		0,11 W/mK		0,14 W/mK		
60 dB		57 dB		58 dB		
15 dB		17 dB		16 dB		
97 dB (A)		97 dB (A)		97 dB (A)		
96,1 sone		96,7 sone		94,1 sone		
94,1 sone		96,7 sone		94,1 sone		
< 2 kV (antistatic)		< 2 kV (antistatic)		< 2 kV (antistatic)		
Class 1		Class 1		Class 1		
FSC® certified (optional)		FSC® certified (optional)		FSC® certified (optional)		
good		good		good		
Ultrafresh		Ultrafresh		Ultrafresh		
ok		ok		ok		
<2,1 %		<2,1 %		<2,1 %		
A+		A+		A+		
Pass		Pass		Pass		
Compliant		Compliant		Compliant		
Compliant		Compliant		Compliant		
Pass		Pass		Pass		
Class E1 (<0,13 ppm)		Class E1 (<0,13 ppm)		Class E1 (<0,13 ppm)		
Class E1 (<3,5 mg/m³h)		Class E1 (<3,5 mg/m³h)		Class E1 (<3,5 mg/m³h)		
CARB 2		CARB 2		CARB 2		
0 %		0 %		0 %		
PCP free		PCP free		PCP free		
Class 3**		Class 3**		Class 3**		
Class Cfl s1 (on demand Bfl s1)		Class Dfl s1 (on demand Cfl s1)		Class Dfl s1 (on demand Cfl s1)		
Class R11 (average)		Class R11 (average)		Class R11 (average)		
Class >15 (USRV)		Class >15 (USRV)		Class >15 (USRV)		

* 1=surface destruction, 5=no visibel changes / ** class 3 = moderate change of gloss level and/or moderate brown spot

We'll help you out in making the right CHOICE.

Would you like to see the quality of Par-ky with your own eyes and feel the natural warmth of the wood? Are you unable to choose between the different varieties of wood and colours? Then we'll happily help you with your choice! Our distributors have all the necessary knowledge and their stores are equipped with a display containing up-to-date samples. This will make choosing your dream floor quick and easy.

You can find your nearest store at www.par-ky.com/en/Dealers or by scanning this code with your smartphone.



Decospan nv
Industriezone Grensland
Lageweg 33
8930 Menen - Belgium
tel +32 56 52 88 49
info@par-ky.com

www.par-ky.com



© Decospan 2019 - Nothing from this brochure may be reproduced without written prior permission.

Please note that the information in this brochure may be outdated and a new version may already have been issued. That is why we recommend you to always consult our website to download the most recent version. The photos of the different wood species, as shown in this brochure, are a representation of a unique part of wood and are not binding for future deliveries.

Decospan is committed to the continuous improvement of its products and services, therefore the actual products may differ from the products and pictures in this brochure. Decospan disclaims any liability pursuant to the variations that may occur between the products and pictures in this brochure and the actual products. All content in this brochure is for information purposes only and no rights can be obtained therefrom.

a product of
DECOSPAN®
Wood Solutions